


CN565S2 drives 38 to 65mm flat wire collated welded nails
drives 32 to 65mm flat plastic sheet collated nails

FEATURES

● Slim guide contact arm

CN565S2 provides "Quality finish" due to the working of slim guide contact arm.

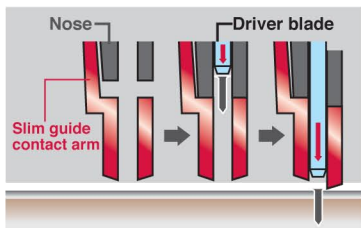

● Anti-double fire mechanism (UK Patent GB2286790)



The tool can be contact or single fired with no adjustments to tool.

APPLICATIONS

- Siding ● Fencing ● Exterior trim ● Sheeting ● Subfloors
- Roof decking ● Exterior decking ● Furring ● Strapping

TOOL SPECIFICATIONS

| | |
|--------------------|--|
| MODEL | CN565S2 |
| WEIGHT | 2.3 kg |
| DIMENSIONS | 302(H)x127(W)x275(L)mm |
| LOAD CAPACITY | 400 Nails |
| OPERATING PRESSURE | 5 to 7 bar (70 to 100 psi) |
| AIR CONSUMPTION | 1.54ℓ at 7 bar (0.05ft ³ at 100 psi) operating pressure |
| MODEL | CN565S2 |
| NOISE | A-weighted single-event sound power level LWA, 1s, d 98.8 dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 90.5 dB These values are determined and documented in accordance to EN12549:1999 |
| VIBRATION | Vibration characteristic value = 4.38m/s ² These values are determined and documented in accordance to ISO 8662-11 |

● Smaller design, only 302mm



● Dial adjustable depth control





● Easy twist adjustable exhaust deflector



● Easy-load magazine



● Maintenance free end cap filter (DEU Patent 19539950) (UK Patent 2294412)

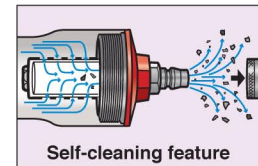


FASTENERS APPLICABLE

15 degree flat and conical wire welded nails



15 degree flat plastic sheet collated nails

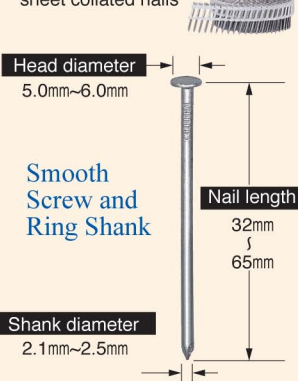

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

For further information please contact your local dealer or Melbourne Nails Aust.