

# Super Metal Framer



## CN650M

drives 27~50mm (1 1/8"~2") nails into 2.3~3.2mm (t) metal and also concrete




### APPLICATIONS


- Wood on concret fastening
- Wood on metal fastening



- Siding on metal stud

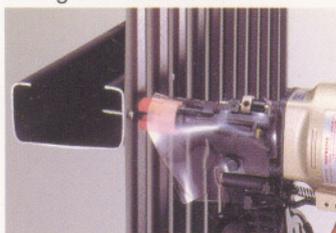

- Steel sheet to concrete
- Metal siding
- Wood furring to block
- Subflooring and under-layment
- Wall and roof sheathing
- Floor decking
- Metal sheet roofing

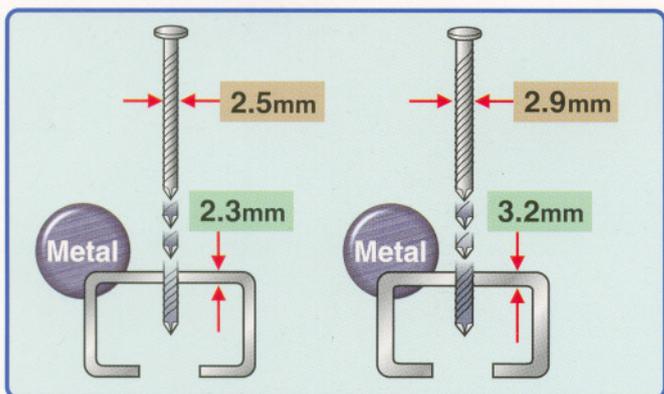

### TOOL SPECIFICATIONS

MODEL	CN650M
WEIGHT	3.0kg (6.6 lbs)
DIMENSIONS	380(H)×132(W)×277(L)mm 15"×5-1/4"×11"
LOAD CAPACITY	200 nails
OPERATING PRESSURE	5~7kg/cm <sup>2</sup> (Regulator) 70~100p.s.i.
AIR CONSUMPTION	1.60/cycle at 6 bar (90p.s.i.) operating pressure
NOISE	A-weighted single-event sound power level <b>LWA, 1s, d 96.3dB</b> A-weighted single-event emission sound pressure level at work station <b>LpA, 1s, d 85.5dB</b> These values are determined and documented in accordance to CEN/TC 255 WG 1 N 45.3 E. (EN-standard in preparation)
VIBRATION	Vibration characteristic value = 4.18m/s <sup>2</sup> These values are determined and documented in accordance to ISO 8662-11

### FEATURES

- Lightweight-only 3.0kg (6.6 lbs)
- Powerful
- Anti-double fire mechanism (UK patent 2286790)

The tool can be contact or single fired with no adjustments to tool. Simply pull the trigger then depress the contact arm and tool will contact fire. To single fire, first depress the contact arm, then pull and hold the trigger. Tool can not fire a second nail until trigger is released and tool can cycle. This is a superior safety feature.



- Dial adjustable depth control  
Dial depth control requires no special tools.



- Easy twist adjustable exhaust deflector  
Exhaust air can easily be diverted 360° away from user without any tool.
- Comfortable rubber grip

### FASTENERS APPLICABLE



The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



**MAX CO.,LTD.**

6-6 NIHONBASHI HAKOZAKI-CHO, CHUO-KU, TOKYO, JAPAN  
PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104  
Web: <http://www.max-ltd.co.jp/int/>

Distributor:



Printed on Recycled Paper  
PRINTED IN JAPAN  
OS7118AN T0212