




Melbourne Nails Aust



# AB25/268

**THE LATEST IN A GREAT RANGE OF BELT DRIVEN COMPRESSORS**

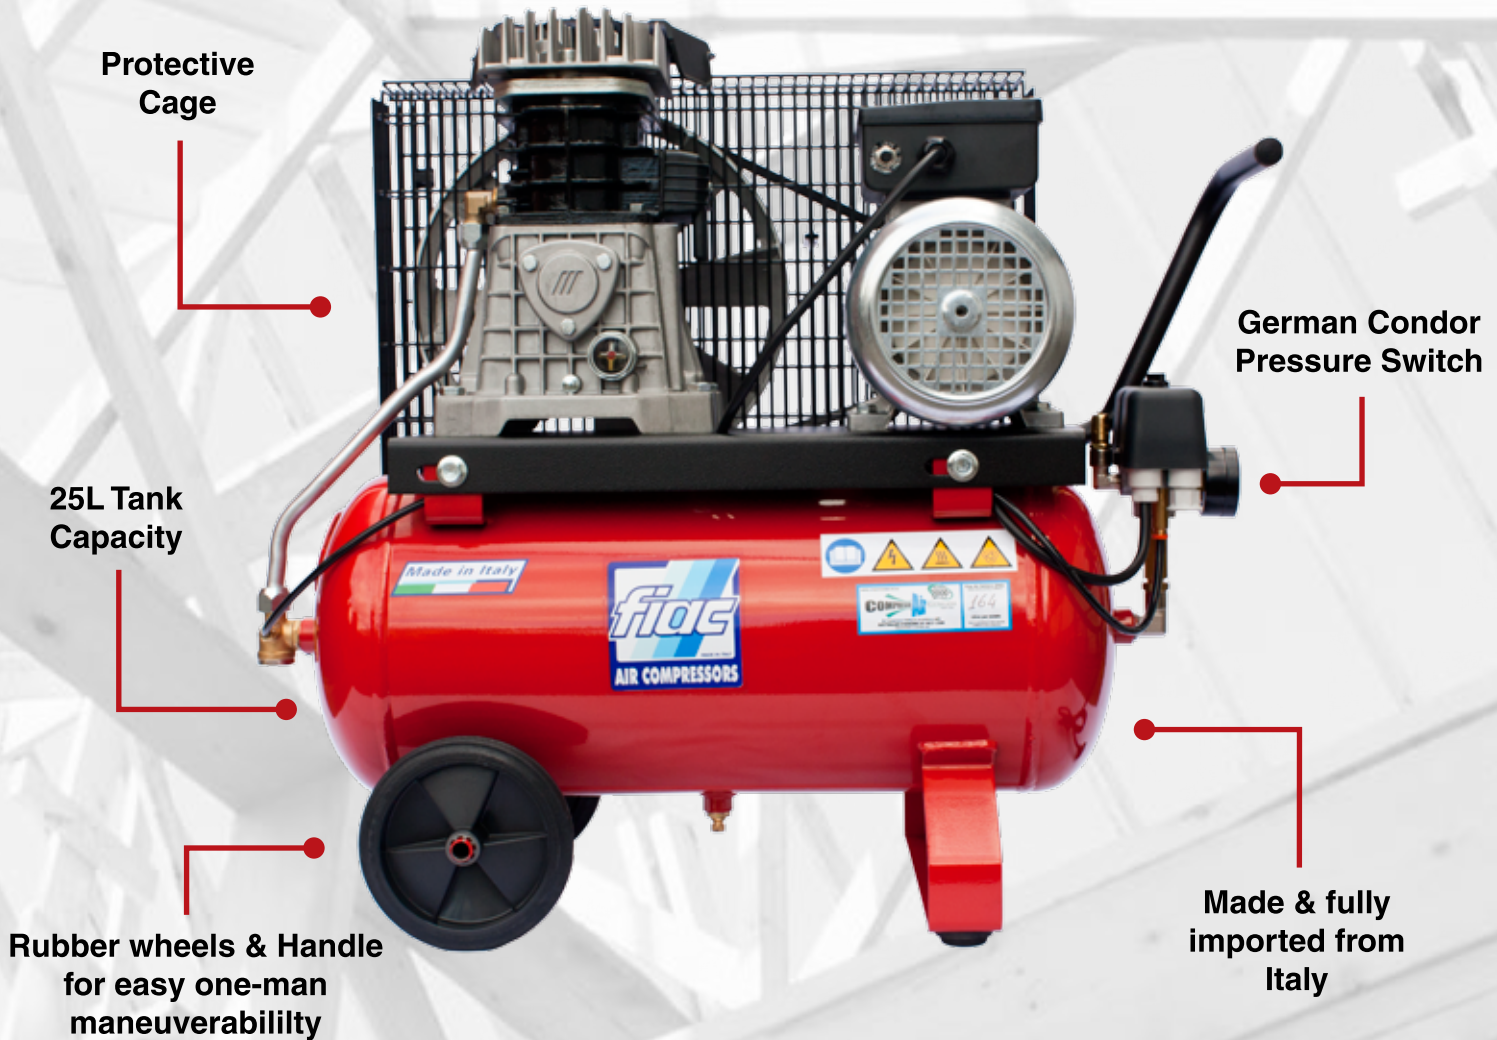

Model	Pump Displ.		Free Air Delivery		Motor Power		Req'd Circuit	Tank Volume	Noise Level	Outlet	Weight	Dimensions (cm)		
	cfm	L/min	cfm	L/min	hp	kW	Amps	L	dB(A)	BSP	Kg	L	W	H
<b>AB25/268</b>	8.8	250	5.5	164	2	1.50	10	25	95	1/4"	42	750	340	645

- Maximum outlet pressure for Belt Driven Compressors is 145psi.
- Performance ratings are determined in accordance with Australian Standard AS 4637-2006
- Two Port Filter/regulator fitted as standard
- All measurements are approximate