

# SuperStapler

# MAX<sup>®</sup>

## TA551A/16-11




drives 25–51mm (1"–2") 16ga. medium crown  
11mm (7/16") staples



### FEATURES

- Lightweight-only 2.2 kg
- Newly designed 3 tooth driver blade (Patent pending)

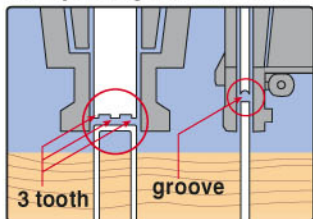

The center teeth of the driver blade pushes the center part of the crown of each staple and side tooth hold it firmly so that it prevents jamming when it drives. The ditch of the driver blade holds each staple firmly and prevents slipping problem.



Newly designed 3 tooth driver blade





- **Rapid fire trigger valve**  
Fastest medium crown stapler in the market. It drives 15 staples per second.

- **Quick and easy jam clearing by new design front latch (Patent pending)**



- **Adjustable depth control**
- **Maintenance free end cap filter (DEU Patent 19539950, UK Patent 2294412)**  
It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.

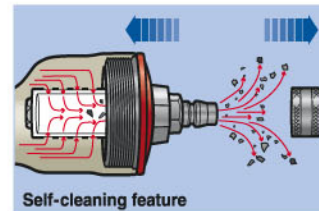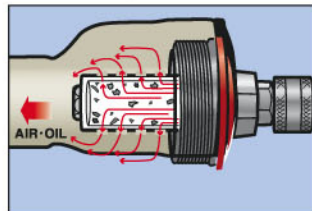

- **New design click lever**
- **Comfortable rubber grip**
- **Durable aluminum frame and cylinder cap**


### APPLICATIONS

- Sheathing ● Subflooring ● Roof decking
- Furniture frames ● Pallets ● Crate and box assembly
- Vinyl siding

### TOOL SPECIFICATIONS

MODEL	TA551A/16-11
WEIGHT	2.2kg (4.9 lbs)
DIMENSIONS	288(H) × 84(W) × 356(L)mm 11-3/8" × 3-1/4" × 14"
LOAD CAPACITY	157 staples
OPERATING PRESSURE	5–7kg/cm (Regulator) 70–100 psi
AIR CONSUMPTION	1.1l/cycle at 6 bar (90 psi) operating pressure
NOISE	A-weighted single-event sound power level <b>LWA, 1s, d 93.78 dB</b> A-weighted single-event emission sound pressure level at work station <b>LpA, 1s, d 86.04 dB</b> These values are determined and documented in accordance to EN12549:1999
VIBRATION	Vibration characteristic value = 3.6m/s <sup>2</sup> These values are determined and documented in accordance to ISO 8662-11

### STAPLES APPLICABLE

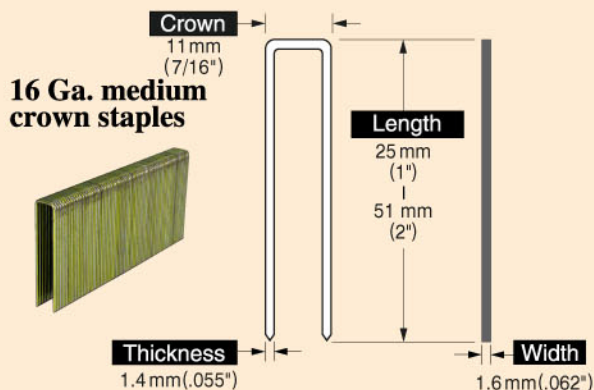

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

For further information please contact your **local dealer** or Melbourne Nails Aust.

# MAX



Melbourne Nails Aust  
Ph: (03) 9460 5322  
sales@melbnails.com.au  
www.melbnails.com.au